



washing jack installation drawing

LIFTING CAPACITY : 16 Tons Max.
LIFTING HEIGHT : 1450-1500 mm

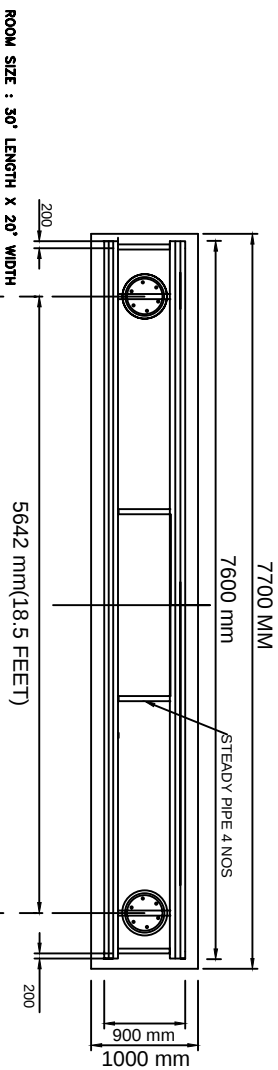


ROOM SIZE : 30' LENGTH X 20' WIDTH

5642 mm(18.5 FEET)

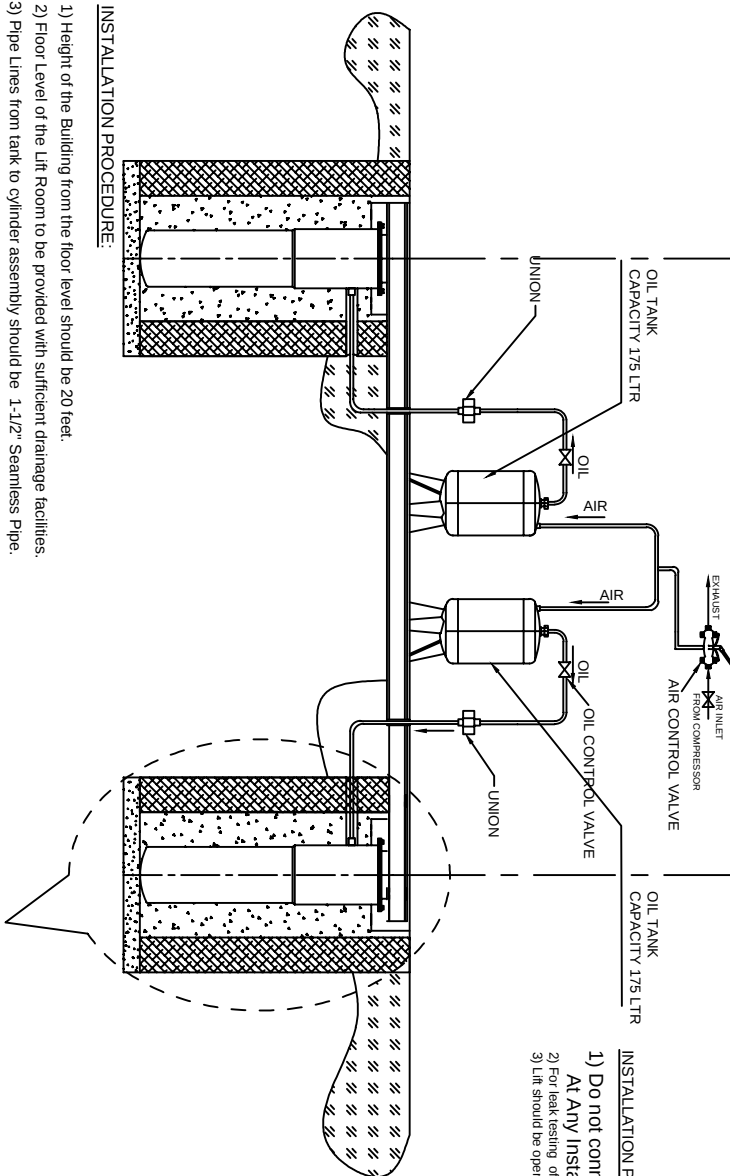

INSTALLATION PROCEDURE:

- 1) Do not connect air to the system with-out filling oil
- 2) For leak testing of pipe line, refer manual book.
- 3) Lift should be operated with oil & oil control valve(OCCV) only

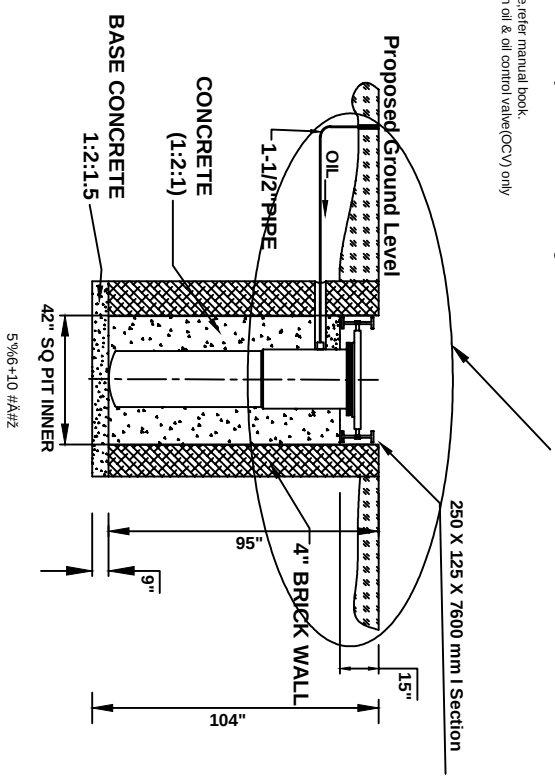

INSTALLATION PROCEDURE:

- 1) Height of the Building from the floor level should be 20 feet.
- 2) Floor Level of the Lift Room to be provided with sufficient drainage facilities.
- 3) Pipe Lines from tank to cylinder assembly should be 1-1/2" Seamless Pipe.
- 4) Pipe Line should be with bends and couplings wherever necessary.
- 5) The Pipe lines from IOR tank to cylinder assy. should be laid in channels and should be covered with cement slab only WITH-OUT concreteing.
- 6) The concrete for cylinder assy should be maintained 230 mm($\frac{9}{16}$ "(fig.no.2A,TULU-2) from proposed floor level to top of the cylinder assy
- 7) The concrete for cylinder assy should be done at time of Erecting the cylinder assy. So that the straightness RI WKH POLQGHU DVVHPEOI VKRXOG EH DOLQJHG WR $f' f$
- 8) The centre distance of 18.5feet(5642mm) should be maintained before the two lifts erecting.

9) Maintain the length of the oil pipe line (1-1/2") from the tank to plunger assembly in the same length for the 2 lifts.

Rev.No	Date	Revision	Alt.by	Chkd by	Appd by	Area	ECL.No
--------	------	----------	--------	---------	---------	------	--------

ALL DIMENSIONS ARE IN INCHES & MM			
	Sign	Date	
Drawn			
Chkd.			
Appd.			
			