


washing jack installation drawing

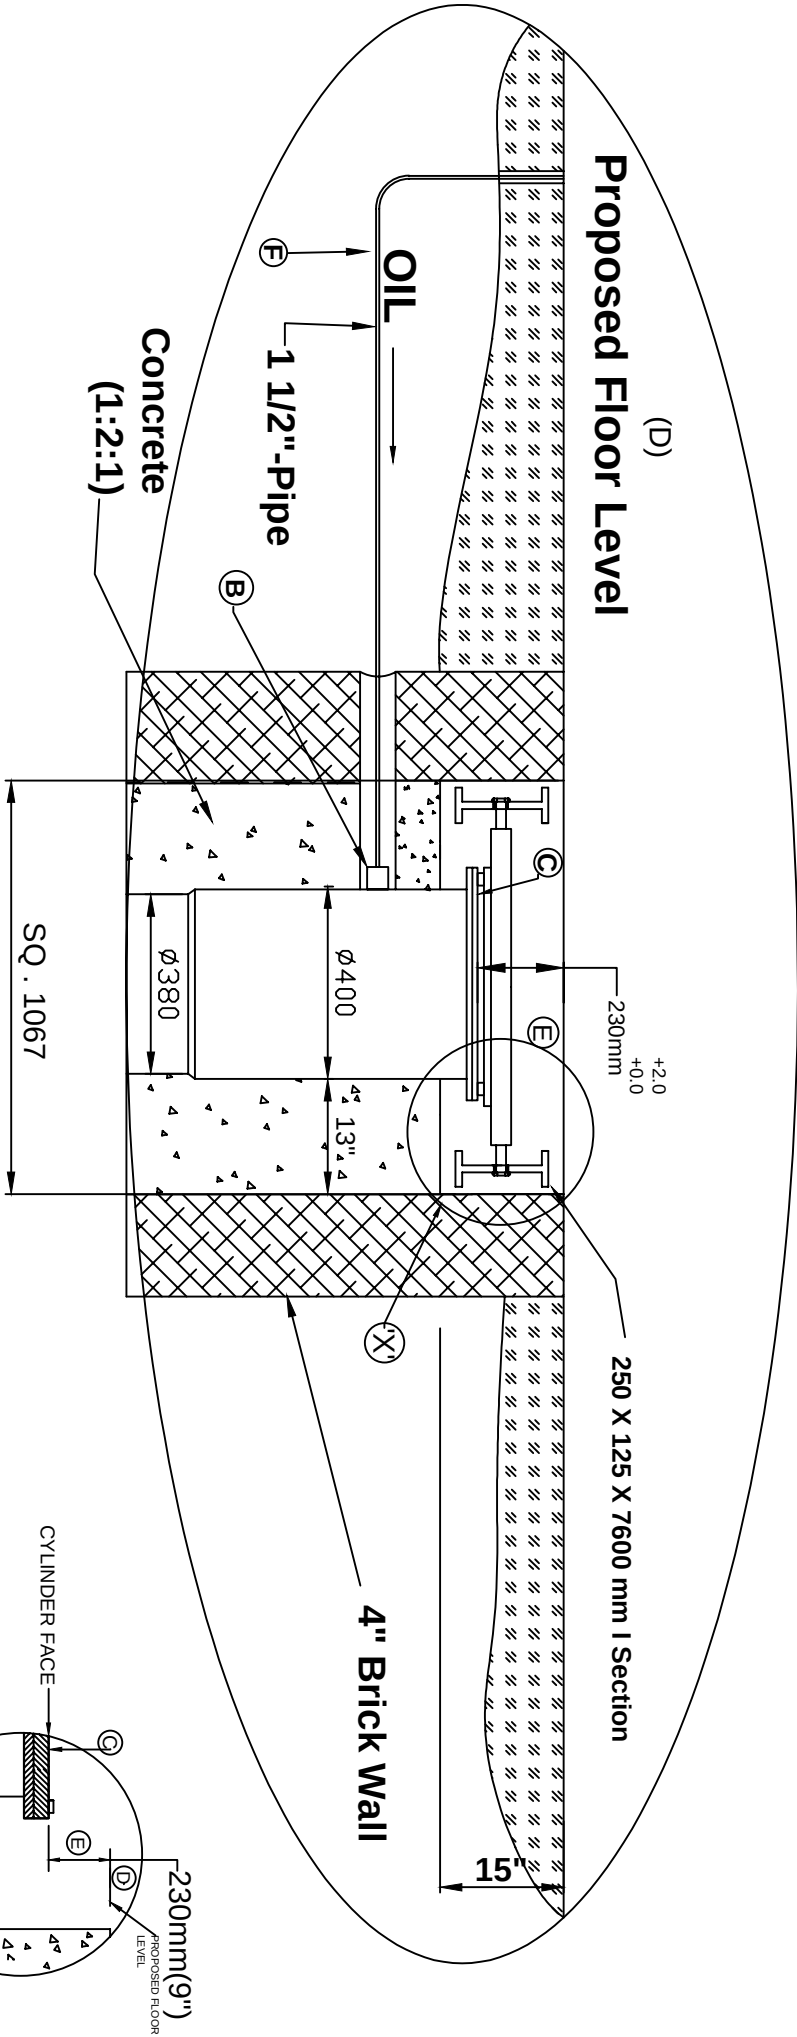

Note:

- 1. The dimension 230^{+2.0}_{+0.0} (E) should be maintained between CYLINDER FACE TOP 'C' to the PROPOSED LEVEL 'D'
- 2. The GI plug provided in the INLET (B) of the plunger assy should be removed only at the time of plumbing work.
- 3. The pipe line (F) OIL tank to cylinder assy should be laid in channels and should be covered with cement slab only without concreting.

ALL DIMENSIONS ARE IN INCHES & MM

DETAIL-"X"

BEFORE PLATFORM ASSEMBLY

B	3.The pipe line (F) OIL tank to cylinder assy should be laid in channels and should be covered with cement slab only without concreting.										B				
	ALL DIMENSIONS ARE IN INCHES & MM														
A						Sign		Date		Designation					
						Drawn									
						Chkd.									
						Appd.									
A															
Rev. No.		Date		Revision		Alt. by		Chkd by		Appd by		Area		ECl. No	